


BIONIQ ROUND DEEP

03

CRYSTAL WHITE

Crystal white
(01-32)



ARTICLE NUMBER 220-0770

350 mA

IP20



MOUNTING

Mounting location: Ceiling
Type: Recessed

ELECTRICAL

Control gear needed: Yes
Control gear included: No
Dimming: Depending on driver

DIMENSION

Diameter: 107 mm
Height: 137 mm
Cut out: D = 98 mm
Min. recessed depth: 150 mm

WEIGHT

Net: 0.621 kg

LIGHT

Adjustability: fixed
Light calculation: Direct
FWHM / Beam Angle: 18°
Beam width: ☐ Spot: 18°
Optics: ☐ Keine Auswahl

LAMP DESCRIPTION

Lamp type: LED
Total power: 13 W
Power loss ballast: 1.2W
Luminous flux of the light source: 1304 lm
Luminous flux of the luminaire: 987 lm
Colour rendering index (CRI): 90
MacAdam: 3
LED colour direct: 2700K


ORDER NUMBER

220-0770 03 27 22 00

TECHNICAL DESCRIPTION

Recessed spotlight (Aluminium die-cast); perfect integration in the room; aluminum coated for best reflection; highly reflective faceted reflector; Microfaceted, aluminum-coated reflector; Precision reflector for accentuation; passive cooling through optimized heat sink; optional optics: optionally LINEAR SPREAD LENS, SPREAD LENS or HONEYCOMB; powder-coated die-cast body; Quick installation through snap-in system; Spring clips for quick assembly; Concrete installation housing available as accessory.; free orientability (EAS); exact positioning system; optimized anti-glare properties ("GLARE PROTECT"); Alignment and fixation using the "ONE LOCK" system; ZERO LIGHT LEAKAGE for acoustic ceilings; Ceiling thicknesses of 10-15 mm; 29 colors possible; RAL colors on request; Dimmability depends on the ballast; Direct light colors: optionally 2700K, 3000K, 3500K or 4000K.; Efficient through COB (Chip-On-Board); CRI > 90; MacAdam: 3; 80,000 hours lifespan; calm ceiling image; optimized glare control through recessed light point plane; directly emitting; Light source can be replaced by professional staff.; Beam widths: "Flood", "Spot/Superspot", "Very wide flood"; complies with EN 60598-1; IP protection type IP20; Electrical Protection Class 3; Height:

Polar Curve

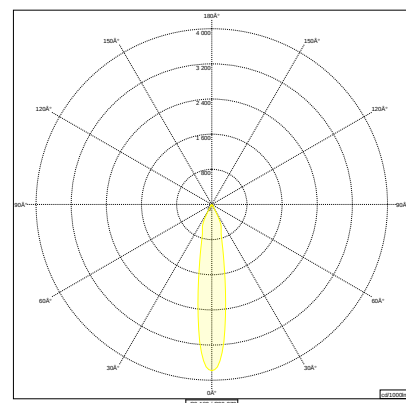

Measurement based on the color white



Date: 5/20/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

Accessories

#	Article Number	Product Description	Img
1	14-00502	TALEXX converter LCI 20W 350mA/500mA/700mA flexC SR ADV ON/OFF	


Date: 5/20/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzers | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at

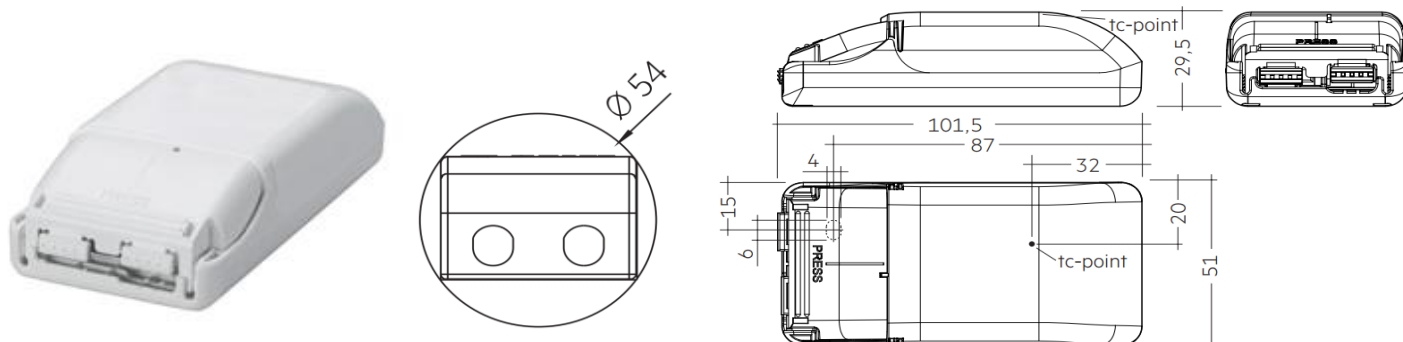

Order number:		14-00502	
Dimming:			
Dimension LxWxH:		101,5 x 51 x 29,5 mm	
Minimum cutout diameter:		54 mm	
Constant current:	Vorward voltage:	Maximum output:	
350	25 - 50	17,5	
500	20 - 40	20	
700	14 - 28,5	20	

Mains voltage:		220 - 240 V	
Frequency:		50/60 Hz	
SEL V:		Yes	
Protection class:		2	
Degree of protection:		IP20	
Maximum possible efficiency:		85%	
Through-wiring possible:		No	

Misprints excepted. Technical changes as far as they contribute to the improvement of the product are possible at any time!
Further details available on request!

PROJECT NAME:
SPECIFIED QTY:
ARTICLE ASSIGNMENT:

Date: 5/5/2021

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Neu-Götzens | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at